SPECIAL SERIES



New high-pressure water blasting units with 37 kW diesel engine









Easy Power XL D: the diesel po Flexibility and independence in

SKID VERSION



TROLLEY VERSION





wer in a compact unit every application



GENERAL FEATURES

- Sturdy painted tubular frame with anti-corrosion treatment
- AISI 304 stainless-steel coated panels
- Practical housings for gun and lance
- Hatz soundproofed 3-cylinder engine
- Belt-pulley transmission
- Industrial low-voltage (24V) power and control panel
- Available in skid version with 4x anti-vibration feet or in trolley version with
 2 x Ø 400 solid wheels with steel axle and ball bearings + 2 castor wheels with brake

OPTIONAL

- Water tank + booster pump
- Total protective and soundproofed paneling



Ideal for all applications in absen High quality construction design







ce of electrical power supply ed to last over time



SECTORS OF USE



High-pressure cleaning companies



Building sites and boatyards



Iron and steel works and mechanical engineering firms



Food-industry companies



Oil, chemical and energy companies

MAIN APPLICATIONS



Removal of paint, rust and graffiti from steel and/or concrete surfaces



Cleaning building scaffolding



Removal of scale deposits and/or marine fouling



Cleaning ships' decks



Cleaning ships' hulls



Hydrosandblasting



EASY POWER XL 47/400 - 38/500 - 30/600



STANDARD FEATURES

- HPP ELH 47/400, ELH 38/500 and ELH 30/600 pumps
- Direct water suction
- S/S DN100 pressure gauge with glycerin
- Unloader valve in stainless steel with pressure release (reset at 50% of set pressure)
- S/S safety valve
- 150 microns water filter (with replaceable cartridge)

OPTIONAL FEATURES

- Dual operator version
- Remote cable emergency stop
- Pump oil over-temperature alarm switch
- Low water pressure switch alarm at pump inlet
- Water tank with booster pump

RECOMMENDED ACCESSORIES



OTHER OPTIONAL ACCESSORIES



MODEL	CODE	PUMP	RPM								
				bar	psi	I/min	US gpm	HP	kW	kg	(L x W x H) cm
EASYPOWER XL 400 D Skid	2.58AC.HK3.0001	ELH 47/400	1000	400	5800	47	12,4	50	37	740	160x123x113
EASYPOWER XL 400 D Trolley	2.58AF.HK3.0001	ELH 47/400	1000	400	5800	47	12,4	50	37	740	160x132x120
EASYPOWER XL 500 D Skid	2.58AC.HK3.0002	ELH 38/500	1000	500	7250	38	10,0	50	37	740	160x123x113
EASYPOWER XL 500 D Trolley	2.58AF.HK3.0002	ELH 38/500	1000	500	7250	38	10,0	50	37	740	160x132x120
EASYPOWER XL 600 D Skid	2.58AC.IK3.0001	ELH 30/600	1000	600	8700	30	7,9	50	37	740	160x123x113
EASYPOWER XL 600 D Trolley	2.58AF.IK3.0002	ELH 30/600	1000	600	8700	30	7,9	50	37	740	160x132x120



EASY POWER XL 19/1000



STANDARD FEATURES

- HPP EV 19/1000 pump
- S/S DN100 pressure gauge with glycerin
- Manual pressure adjustment valve and bypass recirculating line
- Safety valve with rupture disc
- 150 microns water filter with replaceable cartridge. 20 micron S/S water filter at pump inlet (booster outlet)
- Low water pressure switch alarm at pump inlet
- 2 x Safety hose whip stops according to EN 1829-2


OPTIONAL FEATURES

- Remote cable emergency stop
- Pump oil over-temperature alarm switch
- Water tank

RECOMMENDED ACCESSORIES



OTHER OPTIONAL ACCESSORIES

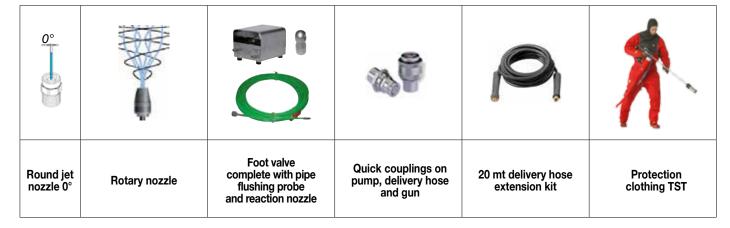

MODE	MODEL	CODE	PUMP	RPM								
					bar	psi	l/min	US gpm	HP	kW	kg	(L x W x H) cm
	EASYPOWER XL 1000 D Skid	2.58AC.IK3.0002	EV 19/1000	900	1000	15000	19	5,0	50	37	760	160x123x113
	EASYPOWER XL 1000 D Trolley	2.58AF.IK3.0003	EV 19/1000	900	1000	15000	19	5,0	50	37	760	160x132x120

www.ptcitaliana.com

